
CONSUMER INFORMATION

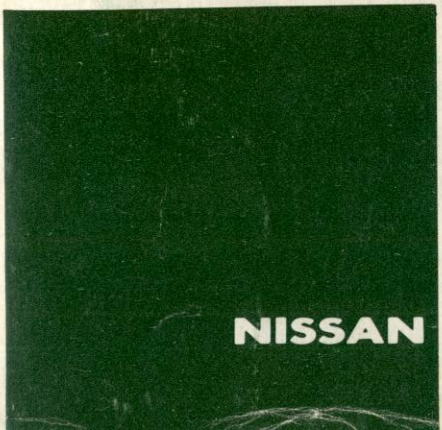

XENON
Z car.com

DATSUN

NISSAN MOTOR CO., LTD. Tokyo, Japan

Dear Datsun Owner:

To find your vehicle information, refer to the charts indicated by a check. If no checks are made, have your Datsun Dealer check the column applicable to your vehicle.

	Check	Vehicle stopping distance	Tire reserve load	Acceleration and passing ability
MODEL S30 SERIES				
DATSUN 240Z		1	11	21
DATSUN 240Z WITH COOLER		1	11	22
DATSUN 240Z AUTOMATIC		1	12	23
DATSUN 240Z AUTOMATIC WITH COOLER		1	12	24
MODEL 610 SERIES				
DATSUN 610 SEDAN		2	13	25
DATSUN 610 HARDTOP		2	13	25
DATSUN 610 SEDAN AUTOMATIC		2	13	26
DATSUN 610 HARDTOP AUTOMATIC		2	13	26
DATSUN 610 STATION WAGON		3	14	27
DATSUN 610 STATION WAGON AUTOMATIC		3	14	28
MODEL 510 SERIES				
DATSUN 1600 SEDAN		4	15	29
DATSUN 1600 SEDAN AUTOMATIC		4	15	30
MODEL B110 SERIES				
DATSUN 1200 SEDAN		5	16	31
DATSUN 1200 COUPE		5	16	31
DATSUN 1200 SEDAN AUTOMATIC		5	16	32
DATSUN 1200 COUPE AUTOMATIC		5	16	32

INTRODUCTION

NOT reading the following may be harmful to **YOUR** health.

The figures contained in the summary following apply to all DATSUN vehicle in the particular group.

In compliance with the National Traffic and Motor Vehicles Safety Act (15 U.S.C. 1401, 1407), our DATSUN cars have been tested extensively and the results compiled to cover completely our total range of automobiles.

It is essential, we feel, that our users should carefully study the data before driving their new DATSUN so that they are familiar with the potential ability of the car, **PRIOR** to using it.

The U.S. Federal Government's Road Traffic Authority has carefully evaluated the statistics relating to the following minimum safety figures and has laid down specific guidelines that we, the manufacturers, must use when arriving at the figures stated in the following pages.

We at Nissan Motor Company of Tokyo, Japan, would like to state that the following figures are accurate and representative but in the event of drivers **NOT** following our recommendations regarding servicing, tire pressures, etc., we cannot accept responsibility for any injuries, damage, etc., apart from the parts covered under the usual Nissan Warranty which **SPECIFICALLY** states that our recommended procedures must be followed carefully in order to validate the warranty.

NISSAN MOTOR CO., LTD.

TOKYO, JAPAN


VEHICLE STOPPING DISTANCE

This figure indicates braking performance that can be met or exceeded by the vehicles to which it applies, without locking the wheels, under different conditions of loading and with partial failures of the braking system. The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and the information may not be correct under other conditions.

MODEL S30

1


Description of vehicles to which this table applies:
DATSUN 240Z, DATSUN 240Z WITH COOLER
DATSUN 240Z AUTOMATIC,
DATSUN 240Z AUTOMATIC WITH COOLER

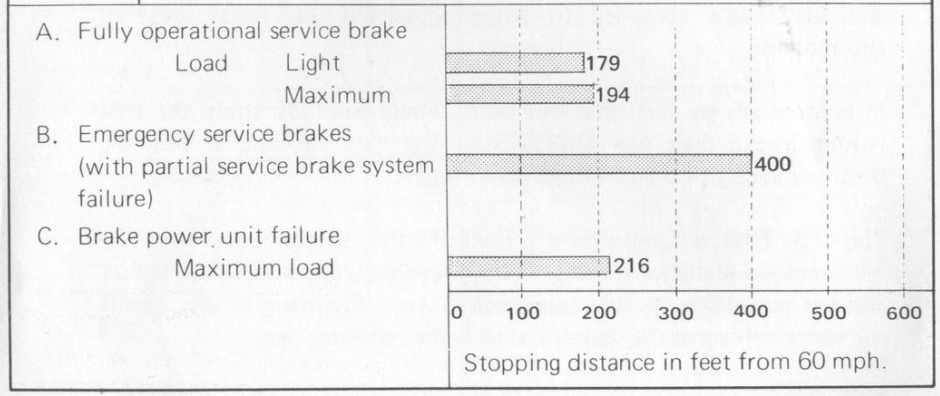

MODEL 610

2

Description of vehicles to which this table applies:
DATSUN 610 SEDAN, DATSUN 610 SEDAN AUTOMATIC
DATSUN 610 HARDTOP
DATSUN 610 HARDTOP AUTOMATIC

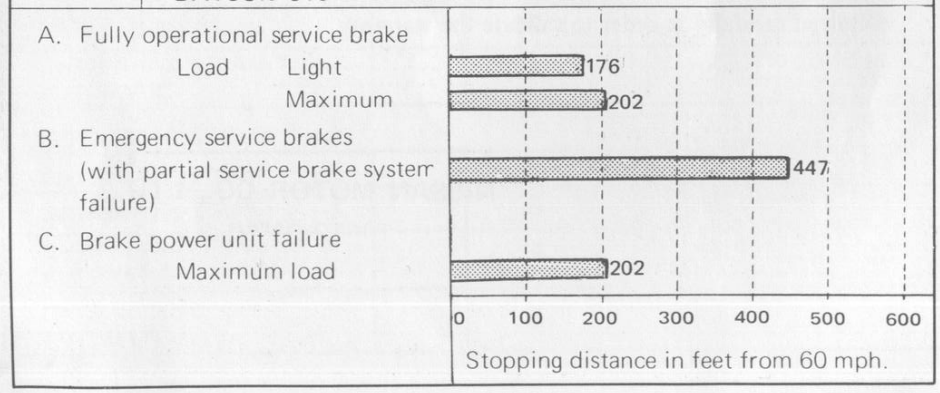


VEHICLE STOPPING DISTANCE

This figure indicates braking performance that can be met or exceeded by the vehicles to which it applies, without locking the wheels, under different conditions of loading and with partial failures of the braking system. The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and the information may not be correct under other conditions.

MODEL 610

3


Description of vehicles to which this table applies:
DATSUN 610 STATION WAGON,
DATSUN 610 STATION WAGON AUTOMATIC

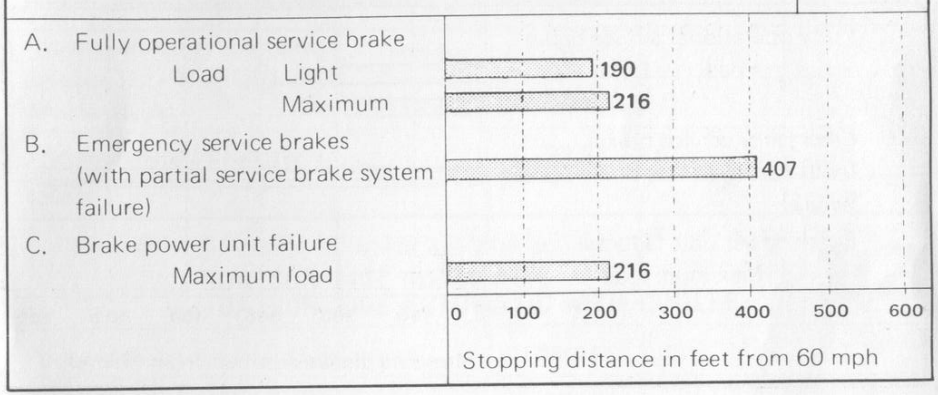

MODEL 510

4

Description of vehicles to which this table applies:
DATSUN 1600 SEDAN,
DATSUN 1600 SEDAN AUTOMATIC

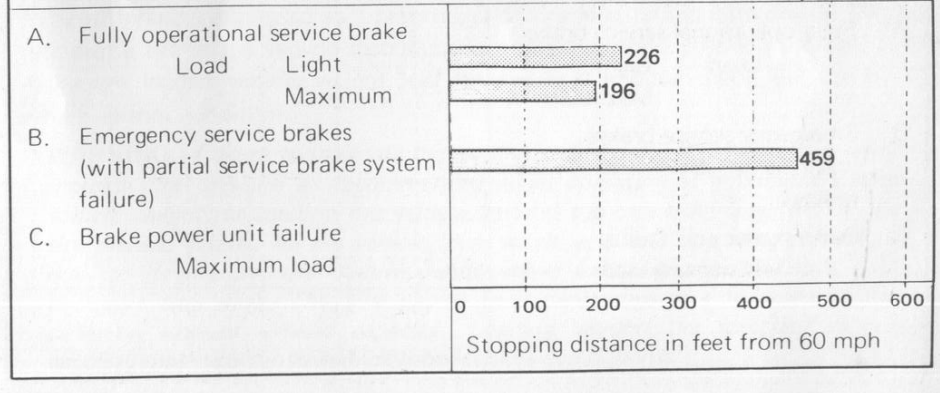

VEHICLE STOPPING DISTANCE


This figure indicates braking performance that can be met or exceeded by the vehicles to which it applies, without locking the wheels, under different conditions of loading and with partial failures of the braking system. The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and the information may not be correct under other conditions.

MODEL B110

5

Description of vehicles to which this table applies:
DATSUN 1200 SEDAN, DATSUN 1200 SEDAN AUTOMATIC
DATSUN 1200 COUPE, DATSUN 1200 COUPE AUTOMATIC

A. Fully operational service brake
Load Light
Maximum
B. Emergency service brakes (with partial service brake system failure)
C. Brake power unit failure
Maximum load

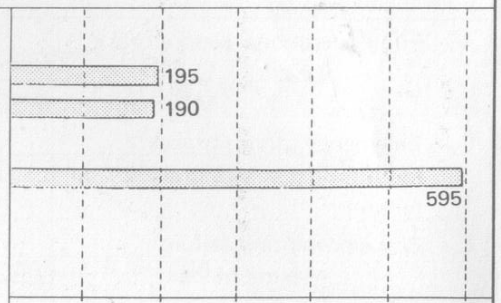


Stopping distance in feet from 60 mph.

6

Description of vehicles to which this table applies:

A. Fully operational service brake
Load Light
Maximum
B. Emergency service brakes (with partial service brake system failure)
C. Brake power unit failure
Maximum load

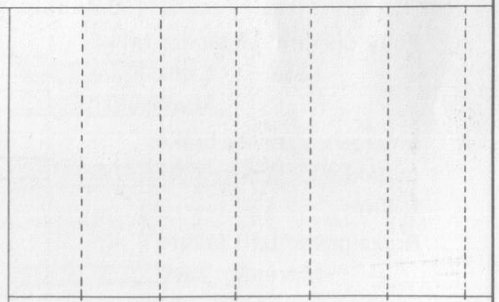

Stopping distance in feet from 60 mph.

TIRE RESERVE LOAD

This table lists the tire size designations recommended by the manufacturer for use on the vehicles to which it applies, with the recommended inflation pressure for maximum loading and the tire reserve load percentage for each of the tires listed. The tire reserve load percentage indicated is met or exceeded by each vehicle to which the table applies.

MODEL S30

Description of vehicles to which this table applies:
DATSUN 240Z
DATSUN 240Z WITH COOLER

11

Recommended tire size designations		175HR14		
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	28		
	Rear	28		
Tire reserve load percentage *		32.3		

Description of vehicles to which this table applies:
DATSUN 240Z AUTOMATIC
DATSUN 240Z AUTOMATIC WITH COOLER

12

Recommended tire size designations		175HR14		
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	28		
	Rear	28		
Tire reserve load percentage *		31.5		

*The difference, expressed as a percentage of tire load rating, between (a) the load rating of a tire at the vehicle manufacturer's recommended inflation pressure at the maximum loaded vehicle weight and (b) the load imposed upon the tire by the vehicle at that condition.

WARNING: ***Failure to maintain the recommended tire inflation pressure or to increase tire pressure as recommended when operating at maximum loaded vehicle weight, or loading the vehicle beyond the capacities specified on the tire placard affixed to the vehicle, may result in unsafe operating conditions due to premature tire failure, unfavorable handling characteristics, and excessive tire wear. The tire reserve load percentage is a measure of tire capacity, not of vehicle capacity. Loading beyond the specified vehicle capacity may result in failure of other vehicle components.***

TIRE RESERVE LOAD

This table lists the tire size designations recommended by the manufacturer for use on the vehicles to which it applies, with the recommended inflation pressure for maximum loading and the tire reserve load percentage for each of the tires listed. The tire reserve load percentage indicated is met or exceeded by each vehicle to which the table applies.

MODEL 610

13	Description of vehicles to which this table applies: DATSUN 610 SEDAN, DATSUN 610 SEDAN AUTOMATIC DATSUN 610 HARDTOP DATSUN 610 HARDTOP AUTOMATIC			
Recommended tire size designations		6.45-13/165-13	165SR13	
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	28	28	
	Rear	32	28	
Tire reserve load percentage *		16.5	12.9	

14	Description of vehicles to which this table applies: DATSUN 610 STATION WAGON DATSUN 610 STATION WAGON AUTOMATIC			
Recommended tire size designations		6.45-13/165-13	165SR13	
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	28	28	
	Rear	32	28	
Tire reserve load percentage *		8.3	4.3	

*The difference, expressed as a percentage of tire load rating, between (a) the load rating of a tire at the vehicle manufacturer's recommended inflation pressure at the maximum loaded vehicle weight and (b) the load imposed upon the tire by the vehicle at that condition.

WARNING: *Failure to maintain the recommended tire inflation pressure or to increase tire pressure as recommended when operating at maximum loaded vehicle weight, or loading the vehicle beyond the capacities specified on the tire placard affixed to the vehicle, may result in unsafe operating conditions due to premature tire failure, unfavorable handling characteristics, and excessive tire wear. The tire reserve load percentage is a measure of tire capacity, not of vehicle capacity. Loading beyond the specified vehicle capacity may result in failure of other vehicle components.*

TIRE RESERVE LOAD

This table lists the tire size designations recommended by the manufacturer for use on the vehicles to which it applies, with the recommended inflation pressure for maximum loading and the tire reserve load percentage for each of the tires listed. The tire reserve load percentage indicated is met or exceeded by each vehicle to which the table applies.

MODEL 510

15	Description of vehicles to which this table applies: DATSUN 1600 SEDAN, DATSUN 1600 SEDAN AUTOMATIC			
Recommended tire size designations		5.60-13-4PR	165SR-13	
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	28	28	
	Rear	32	28	
Tire reserve load percentage *		9.6	14.5	

MODEL B110

16	Description of vehicles to which this table applies: DATSUN 1200 SEDAN, DATSUN 1200 SEDAN AUTOMATIC DATSUN 1200 COUPE, DATSUN 1200 COUPE AUTOMATIC			
Recommended tire size designations		6.00-12-4PR	155SR12	
Recommended cold inflation pressure for maximum loaded vehicle weight	Front	22	24	
	Rear	22	24	
Tire reserve load percentage *		3.0	13.0	

*The difference, expressed as a percentage of tire load rating, between (a) the load rating of a tire at the vehicle manufacturer's recommended inflation pressure at the maximum loaded vehicle weight and (b) the load imposed upon the tire by the vehicle at that condition.

WARNING: *Failure to maintain the recommended tire inflation pressure or to increase tire pressure as recommended when operating at maximum loaded vehicle weight, or loading the vehicle beyond the capacities specified on the tire placard affixed to the vehicle, may result in unsafe operating conditions due to premature tire failure, unfavorable handling characteristics, and excessive tire wear. The tire reserve load percentage is a measure of tire capacity, not of vehicle capacity. Loading beyond the specified vehicle capacity may result in failure of other vehicle components.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

MODEL S30

21

Description of vehicles to which this table applies:
DATSUN 240Z

SUMMARY TABLE

Low-speed pass	**370 feet;**	**7.6 seconds**
High-speed pass	**1,150 feet;**	**12.0 seconds**


22

Description of vehicles to which this table applies:
DATSUN 240Z WITH COOLER


SUMMARY TABLE

Low-speed pass	**375 feet;**	**7.7 seconds**
High-speed pass	**1,190 feet;**	**12.5 seconds**

LOW-SPEED

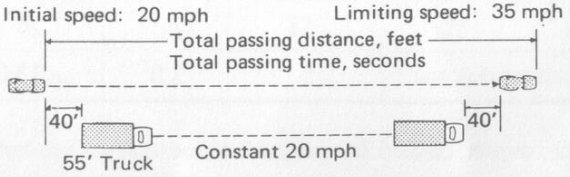

HIGH-SPEED

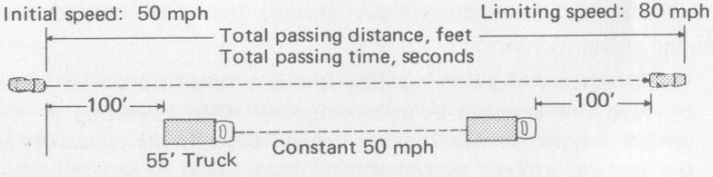

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

Model S30

23

Description of vehicles to which this table applies:
DATSUN 240Z AUTOMATIC

SUMMARY TABLE

Low-speed pass	**405 feet;**	**8.7 seconds**
High-speed pass	**1,260 feet;**	**13.5 seconds**


24

Description of vehicles to which this table applies:
DATSUN 240Z AUTOMATIC WITH COOLER


SUMMARY TABLE

Low-speed pass	**405 feet;**	**8.8 seconds**
High-speed pass	**1,300 feet;**	**14.0 seconds**

LOW-SPEED

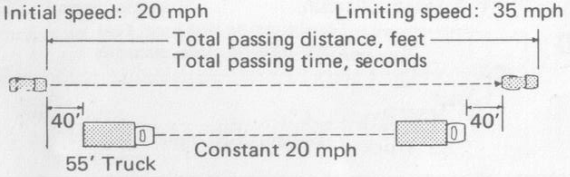

HIGH-SPEED

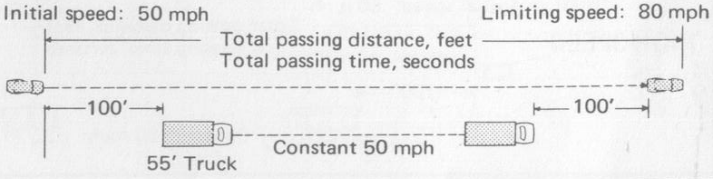

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

MODEL 610

25

Description of vehicles to which this table applies:
DATSUN 610 SEDAN, DATSUN 610 HARDTOP

SUMMARY TABLE


Low-speed pass	**395 feet;**	**8.4 seconds**
High-speed pass	**1,330 feet;**	**14.5 seconds**

26

Description of vehicles to which this table applies:
DATSUN 610 SEDAN AUTOMATIC
DATSUN 610 HARDTOP AUTOMATIC

SUMMARY TABLE

Low-speed pass	**415 feet;**	**9.2 seconds**
High-speed pass	**1,520 feet;**	**17.0 seconds**

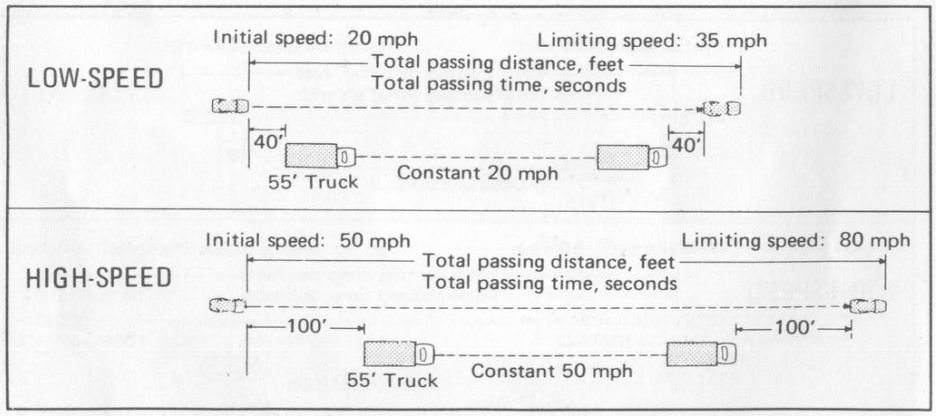

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

MODEL 610

27

Description of vehicles to which this table applies:
DATSUN 610 STATION WAGON

SUMMARY TABLE


Low-speed pass	**400 feet;**	**8.5 seconds**
High-speed pass	**1,330 feet;**	**14.5 seconds**

28

Description of vehicles to which this table applies:
DATSUN 610 STATION WAGON AUTOMATIC

SUMMARY TABLE

Low-speed pass	**420 feet;**	**9.3 seconds**
High-speed pass	**1,540 feet;**	**17.5 seconds**

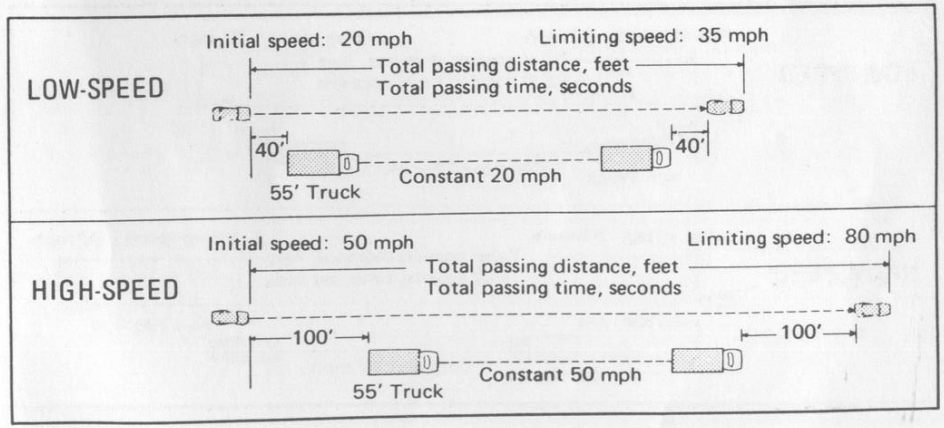

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

MODEL 510

29

Description of vehicles to which this table applies:
DATSUN 1600 SEDAN

SUMMARY TABLE

Low-speed pass	**415 feet;**	**9.1 seconds**
High-speed pass	**1,410 feet;**	**15.5 seconds**


30

Description of vehicles to which this table applies:
DATSUN 1600 SEDAN AUTOMATIC


SUMMARY TABLE

Low-speed pass	**420 feet;**	**9.2 seconds**
High-speed pass	**1,630 feet;**	**18.5 seconds**

LOW-SPEED

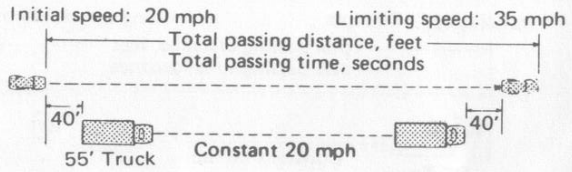

HIGH-SPEED

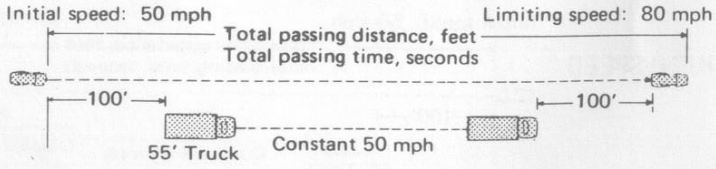

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*

ACCELERATION AND PASSING ABILITY

This figure indicates passing times and distances that can be met or exceeded by the vehicles to which it applies, in the situations diagrammed below.
The low-speed pass assumes an initial speed of 20 mph and a limiting speed of 35 mph. The high-speed pass assumes an initial speed of 50 mph and a limiting speed of 80 mph.

MODEL B110

31

Description of vehicles to which this table applies:
DATSUN 1200 SEDAN, DATSUN 1200 COUPE

SUMMARY TABLE

Low-speed pass	**420 feet;**	**9.2 seconds**
High-speed pass	**1,480 feet;**	**16.6 seconds**


32

Description of vehicles to which this table applies:
DATSUN 1200 SEDAN AUTOMATIC
DATSUN 1200 COUPE AUTOMATIC


SUMMARY TABLE

Low-speed pass	**450 feet;**	**10.2 seconds**
High-speed pass	**1,640 feet;**	**18.8 seconds**

LOW-SPEED

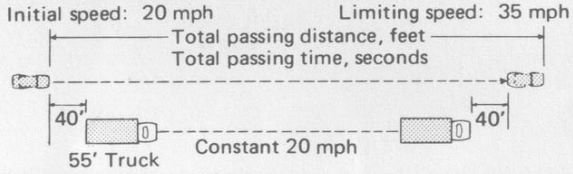

HIGH-SPEED

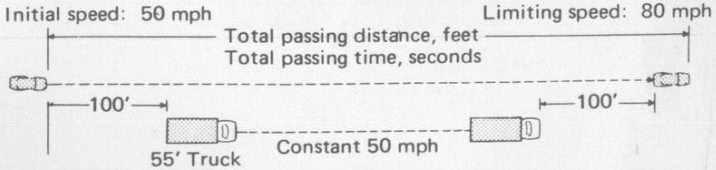

NOTICE: *The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and information may not be correct under other conditions.*



2nd Revised Edition
Issue date: 10th September 1972 (165000)
Printed in Japan Publication No. CI3E-ALLMU3